


Yokohama Geolandar M/T King of the Off-Road.

The Tire That Takes On Mother Nature.

Tread Pattern

Improves self-cleaning ability of tread and increases traction without sacrificing straight-line stability in on-road applications.




Optimum Bite Shoulder

Scalloped shoulder blocks for optimum side-bite traction and claw-like grip.

Step Block Groove Configuration

Stepped central groove provides additional biting edge for increased traction and tread stability, as well as improved water drainage.





Big Tread Blocks

Extra-large tread blocks and wide void area provide strong, aggressive traction and performance over muddy and uneven terrain.

Large Void Area


Expansive void area between tread blocks provides tenacious traction on soft, muddy surfaces.



Extra Sidewall Ribs

Provide added protection against punctures, abrasions, cuts and other off-road hazards.

GEOLANDAR M/T

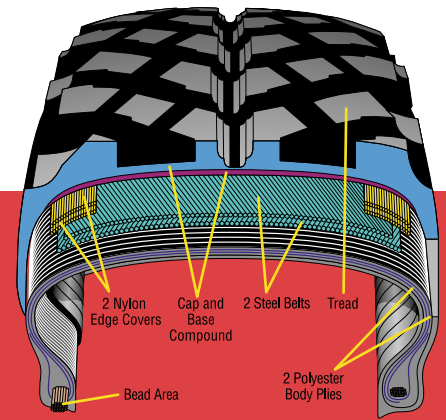

Construction may vary by size.

For Vehicles Such As:

Chevy Blazer
Chevy Suburban
Dodge Durango
Dodge Ram
Ford Expedition
Ford F-Series
Jeep Wrangler
Toyota 4-Runner

Yokohama 30-Day Performance Promise

• Test drive the Geolandar M/T Directional for 30 days. If you're not completely satisfied, bring them back for a full refund.*

*See dealer for details.

 **YOKOHAMA**

GEOLANDAR M/T Dimensional Data


Tire Size	Part Number	Rim Width		Inflated Dimensions		Tread Width (Inches)	Tread Depth (32/Inches)	Loaded Dimensions		Maximum Load at Cold Inflation Pressure lbs. @ psi	Maximum Dual Load lbs. @ psi
		Measuring Rim Width (Inches)	Approved Rim Width (Inches)	Overall Width (Inches)	Overall Diameter (Inches)			Static Radius (Inches)	Revs. Per Mile		
LT265/75R16 119Q (D) Left	00154	7.5	7.0 - 8.0	10.6	31.8	8.3	17	14.3	658	3000@65	2755@65
LT265/75R16 119Q (D) Right	00155	7.5	7.0 - 8.0	10.6	31.8	8.3	17	14.3	658	3000@65	2755@65
LT285/75R16 116Q (C) Left	00158	8.0	7.5 - 9.0	11.1	33.0	8.9	17	14.8	634	2755@50	2535@50
LT285/75R16 116Q (C) Right	00159	8.0	7.5 - 9.0	11.1	33.0	8.9	17	14.8	634	2755@50	2535@50
*LT315/75R16 113Q (C)	00149	8.5	8.0 - 10.0	12.4	34.6	9.8	19	15.9	601	2535@35	
30X9.50R15 104Q (C) Left	00152	7.5	6.5 - 8.5	9.8	29.6	7.6	18	13.7	705	1990@50	
30X9.50R15 104Q (C) Right	00153	7.5	6.5 - 8.5	9.8	29.6	7.6	18	13.7	705	1990@50	
31X10.50R15 109Q (C) Left	00150	8.5	7.0 - 9.0	10.7	30.6	8.3	18	14.1	683	2250@50	
31X10.50R15 109Q (C) Right	00151	8.5	7.0 - 9.0	10.7	30.6	8.3	18	14.1	683	2250@50	
33X12.50R15 108Q (C) Left	00160	10.0	8.5 - 11.0	12.8	32.5	9.8	19	14.3	639	2225@35	
33X12.50R15 108Q (C) Right	00161	10.0	8.5 - 11.0	12.8	32.5	9.8	19	14.3	639	2225@35	
35X12.50R15 113Q (C) Left	00162	10.0	8.5 - 11.0	13.2	34.3	9.8	19	15.3	609	2555@35	
35X12.50R15 113Q (C) Right	00163	10.0	8.5 - 11.0	13.2	34.3	9.8	19	15.3	609	2555@35	

*Directional tread pattern with black sidewall

GEOLANDAR M/T Features & Benefits

Feature	Directional Tread Pattern	Optimum Bite Shoulder	Step Block Groove Configuration	Big Tread Blocks	Large Void Area	Extra Sidewall Ribs	30 Day Trial*
Benefit	Improves self-cleaning ability and increases traction in on-road applications.	Scalloped shoulder blocks allow for side-bite traction.	Provides additional biting edge for increased traction, stability and improved water drainage.	Provide aggressive traction and performance over muddy and uneven terrain.	Provides tenacious traction on soft, muddy surfaces.	Resist abrasion and protect against punctures and cuts.	Test drive for 30 days. Return if not completely satisfied.

*See dealer for details.

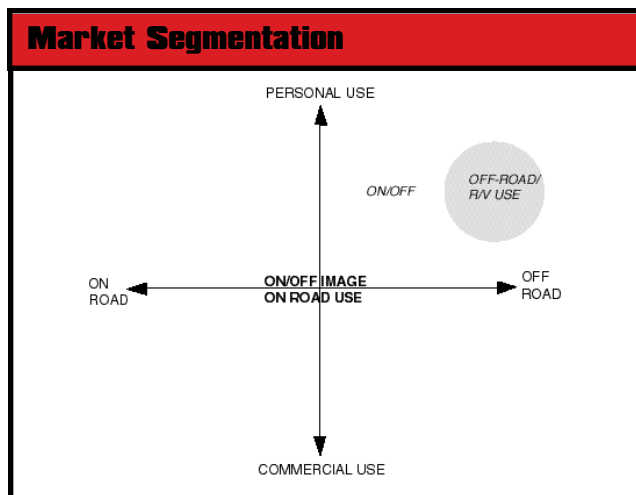

Consumer Affairs: 1-800-722-9888

Corporate Headquarters: Fullerton, CA (714)870-3800 (800)423-4544

Visit our web site at: www.yokohamatire.com

M-175-0104