

# GEOLANDAR M/T+®

## More Rugged Than Ever.

When it comes to getting superior, off-road performance, the Yokohama Geolandar M/T+® delivers. Designed to conquer any surface – from dunes to riverbeds, rocky terrain to the asphalt jungle – the Geolandar M/T+ provides unprecedented grip and incredible strength.

## Special Enhancements Set The Geolandar M/T+ Apart.

### PROGRESSIVE POWER SHOULDER

Large **buttresses** with side protectors enhance durability as the **large scoops** help expel mud and dirt.



### SIDEWALL PROTECTOR BARS

Resist side punctures and cuts with sidewall and rim protector bars.



### TWIN-CUT GROOVES

Extra **tread block grooves** increase traction in dirt, rain, snow and ice.



### DIRECTIONAL TREAD PATTERN

Improves self-cleaning ability of tread and increases traction without sacrificing straight-line stability in on-road applications.



### STEP BLOCK GROOVE CONFIGURATION

**Stepped central groove** provides additional biting edge for increased traction and tread stability, as well as improved water drainage.




### LARGE VOID AREA

Expansive void area between tread blocks provides tenacious traction on soft, muddy surfaces.



### TREAD COMPOUND

Our long-lasting compound broadens the capability of the tire's on-road performance while being more resistant to off-road chipping.

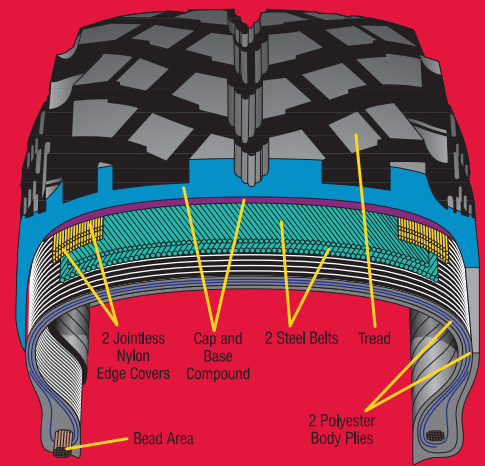

Construction may vary by size and/or speed rating.

### For Vehicles Mentioned Below and Many Others:

Chevy Silverado  
Chevy Suburban  
Dodge Durango  
Dodge Ram  
Ford Expedition

Ford F-Series  
GMC Sierra  
Jeep Wrangler  
Toyota Tundra

### Yokohama's 30-day Performance Promise:

- Test drive the Geolandar M/T+ for 30 days. If not completely satisfied, bring them back for a full refund. See dealer for complete details.



# GEOLANDAR M/T+®



## Size Chart

Tire Size	Part No.	Unit Weight (lbs.)	Rim Width		Inflated Dimensions			Loaded Dimensions			Max. Load at Cold Inflation Pressure (lbs.@psi)		Type
			Measuring (Inches)	Approved (Inches)	Overall Width (Inches)	Overall Diameter (Inches)	Tread Width (Inches)	Tread Depth (32/Inch)	Static Radius (Inches)	Revs. Per Mile	Single	Dual	
LT265/75R16 112/109Q (C)	00146	47.43	7.5	7.0 - 8.0	10.6	31.9	8.3	17	14.7	652	2470@50	2270@50	BW
LT225/75R16 103/100S (C)	00198^												Data Not Available
LT285/75R16 116/113Q (C)	00147	51.60	8.0	7.5 - 9.0	11.5	32.9	8.9	17	15.2	632	2755@50	2535@50	BW
LT305/70R16 118/115Q (D)	00145	57.30	9.0	8.0 - 9.5	12.5	33.2	9.5	17	15.1	625	2910@50	2680@50	BW
LT315/75R16 113Q (C)	00148	64.60	8.5	8.0 - 10.0	12.0	34.6	9.8	17	15.9	600	2535@35		BW
LT265/70R17 112/109Q (C)	00144	50.00	8.0	7.0 - 8.5	10.9	32.0	8.4	17	14.7	650	2470@50	2270@50	BW
30X9.50R15LT 104Q (L)	00136	37.61	7.5	6.5 - 8.5	9.8	29.7	7.6	18	13.7	700	1985@50		OWL
30X9.50R15LT 104Q (R)	00137	37.61	7.5	6.5 - 8.5	9.8	29.7	7.6	18	13.7	700	1985@50		OWL
31X10.50R15LT 109Q (L)	00138	43.20	8.5	7.0 - 9.0	10.7	30.6	8.3	18	14.1	678	2270@50		OWL
31X10.50R15LT 109Q (R)	00139	43.20	8.5	7.0 - 9.0	10.7	30.6	8.3	18	14.1	678	2270@50		OWL
33X12.50R15LT 108Q (L)	00140	51.93	10.0	8.5 - 11.0	12.7	32.6	9.8	19	15.0	638	2205@35		OWL
33X12.50R15LT 108Q (R)	00141	51.93	10.0	8.5 - 11.0	12.7	32.6	9.8	19	15.0	638	2205@35		OWL
35X12.50R15LT 113Q (L)	00142	58.46	10.0	8.5 - 11.0	13.0	34.4	9.8	19	15.7	604	2535@35		OWL
35X12.50R15LT 113Q (R)	00143	58.46	10.0	8.5 - 11.0	13.0	34.4	9.8	19	15.7	604	2535@35		OWL
35X12.50R17 119Q	00189	61.70	10.0	8.0 - 11.0	12.8	34.6	9.8	17	16.4	604	3000@50		RBL
37X12.50R17 124Q (D)	00165	71.60	10.0	8.5 - 11.0	13.0	36.7	9.8	17	17.5	573	3525@50		RBL
38X13.50R17 119Q	00190	79.34	11.0	8.5 - 11.0	13.0	37.7	10.6	21	17.9	548	3000@35		RBL
40X13.50R17 121Q	00191	85.80	11.0	8.5 - 11.0	13.4	39.7	10.6	21	18.9	520	3195@35		RBL
38X13.50R18 126Q (D)	00192^												Data Not Available
40X13.50R18 124Q	00193^												Data Not Available
35X12.50R20 121Q	00197^												Data Not Available
37X12.50R20 120Q (D)	00194^												Data Not Available
38X15.50R20 125Q (D)	00195^												Data Not Available
40X15.50R20 130Q (D)	00196^												Data Not Available

^Available 2nd Half 2009



Consumer Affairs: 1-800-722-9888  
 Corporate Headquarters: Fullerton, CA 1-714-870-3800 • 1-800-423-4544  
 Visit our web site at: [www.yokohamatire.com](http://www.yokohamatire.com)