

AVID TOURING-S™

Smooth Handling And Durability In Any Season.

Built to deliver exceptional ride quality and stability, the all new AVID TOURING-S™ delivers confidence for the daily commute. Drivers of today's cars and minivans, can now experience a new level of comfort from the AVID® family's latest all-season tire.

Superior Comfort and Traction


TWIN RAIL STABILITY RIB

Offers better on-center feel and minimizes pattern noise.



TAPERED RAIN CHANNELS

Work in tandem with circumferential grooves to accelerate water evacuation for optimal wet traction.



LUXURY SIDEWALL CONSTRUCTION

Utilizes a tapered, hard rubber insert, twice the height of conventional inserts, for better absorption of bumps and vibrations.



CROSS TRACTION SIPES

Create more biting edges for better traction and handling in wet or wintery conditions.



SILENT SHOULDER

Uses extra sipes and variable tread block sizes to keep road noise low for a quiet, comfortable ride.



Enhanced Durability


TRI-PLEX TREAD COMPOUND

Provides increased tread life and improved traction through a combination of advanced ①cap, ②base and ③buttress compounds.



CONTOURED BEAD DESIGN

Creates a tighter bead-to-rim fit for increased durability, improved handling and a smoother ride.

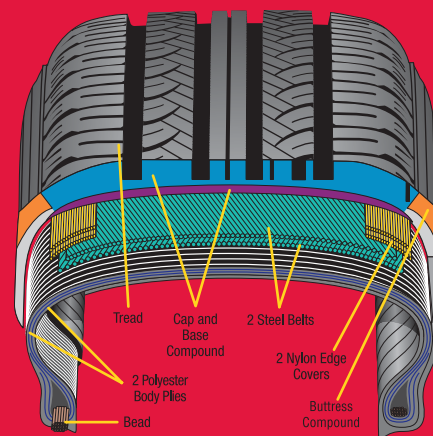

Construction may vary by size.

For Vehicles Mentioned Below and Many Others:

- | | |
|---------------------------|--------------------|
| Buick LeSabre | Honda CRV |
| Chevrolet Cavalier | Honda Fit |
| Chevrolet Cobalt | Mitsubishi Lancer |
| Chevrolet Malibu | Nissan Altima |
| Chevrolet Uplander | Nissan Frontier |
| Chrysler PT Cruiser | Olds Alero |
| Chrysler Sebring | Pontiac Grand Am |
| Chrysler Town and Country | Pontiac Grand Prix |
| Dodge Caravan | Saturn Astra |
| Dodge Intrepid | Saturn ION |
| Dodge Stratus | Scion xA/xB |
| Ford Contour | Toyota Camry |
| Ford Focus | Toyota Corolla |
| Ford Freestar | Toyota Echo |
| Ford Fusion | Toyota Prius |
| Ford Taurus | Toyota Sienna |
| Honda Accord | Toyota Tacoma |
| Honda Civic | Toyota Yaris |

Assurance of Value

- 65,000-Mile Limited Treadwear Warranty.
- 620/A/B—Excellent durability and traction.
- Test drive the AVID TOURING-S for 30 days. If not fully satisfied, bring them back for a full refund. See dealer for complete details.





Size Chart

Tire Size	Part No.	UTQG Rating	Unit Weight (lbs)	Rim Width		Inflated Dimensions			Loaded Dimensions					Type	Load I.D.
				Measuring (Inches)	Approved (Inches)	Overall Width (Inches)	Overall Diameter (Inches)	Tread Width (Inches)	Tread Depth (32/in)	Static Radius (Inches)	Revs. Per Mile	Cold Pressure Single			
P175/65R14 81S	31801	620/A/B	15.84	5.0	5.0-6.0	7.0	23.1	5.3	10	10.5	900	1019@51	BW	SL	
P185/65R14 85S	31802	620/A/B	17.82	5.5	5.0-6.5	7.4	23.5	5.6	10	10.7	885	1124@51	BW	SL	
P185/70R14 87S	31803	620/A/B	18.04	5.5	4.5-6.0	7.5	24.3	5.7	10	11.0	856	1201@51	BW	SL	
P195/70R14 90S	31804	620/A/B	18.70	6.0	5.0-6.5	8.0	24.8	6.0	10	11.2	837	1312@51	BW	SL	
P185/60R15 84T	31805	620/A/B	17.82	5.5	5.0-6.5	7.4	23.7	5.9	10	10.9	875	1102@51	BW	SL	
P185/65R15 86S	31806	620/A/B	18.26	5.5	5.0-6.5	7.4	24.4	5.6	10	11.2	850	1168@51	BW	SL	
P195/60R15 87T	31807	620/A/B	19.14	6.0	5.5-7.0	7.8	24.3	6.2	10	11.1	856	1190@51	BW	SL	
P195/65R15 89S	31808	620/A/B	19.63	6.0	5.5-7.0	8.0	25.0	5.9	10	11.4	831	1279@51	BW	SL	
P205/65R15 92S	31809	620/A/B	20.68	6.0	5.5-7.5	8.3	25.4	6.2	10	11.6	818	1400@51	BW	SL	
P205/70R15 95S	31810	620/A/B	22.00	6.0	5.0-7.0	8.2	26.4	6.5	10	11.9	787	1499@51	BW	SL	
P215/60R15 93T	31811	620/A/B	21.12	6.5	6.0-7.5	8.7	25.1	6.9	10	11.4	827	1411@51	BW	SL	
P215/65R15 95S	31812	620/A/B	21.78	6.5	6.0-7.5	8.9	25.9	6.7	10	11.8	801	1510@51	BW	SL	
215/70R15 98S	31813	620/A/B	23.76	6.5	5.5-7.0	8.9	26.9	6.9	10	12.1	774	1653@51	BW	SL	
P205/55R16 89T	31814	620/A/B	21.34	6.5	5.5-7.5	8.5	24.9	7.0	10	11.5	835	1279@51	BW	SL	
P205/60R16 91T	31815	620/A/B	21.34	6.0	5.5-7.5	8.2	25.6	6.5	10	11.8	810	1356@51	BW	SL	
P215/60R16 94T	31816	620/A/B	22.22	6.5	6.0-7.5	8.8	26.1	6.9	10	12.0	794	1477@51	BW	SL	
215/65R16 98T	31817	620/A/B	24.20	6.5	6.0-7.5	8.7	27.0	6.9	10	12.3	770	1653@51	BW	SL	
P225/60R16 97S	31818	620/A/B	24.64	6.5	6.0-8.0	9.0	26.6	7.2	10	12.1	780	1609@51	BW	SL	
P225/60R17 98T	31819	620/A/B	27.72	6.5	6.0-8.0	8.9	27.7	7.2	10	12.7	749	1653@51	BW	SL	



SL=Standard Load

