

S.drive®

Aggressive Grip. Smooth Handling. Impeccable Control.

Packed with the latest technological advancements, the S.drive delivers extraordinary grip and handling. With over 70 different sizes, the broadest range of sport sedans and coupes can experience the latest performance upgrade from Yokohama.

Superior Grip


ADVANCED MICRO-FLEXIBLE COMPOUND

Using nanotechnology, Yokohama engineers have developed a revolutionary silica-based compound that conforms to surface irregularities. By maximizing contact between the tire and road, enhanced grip in wet and dry conditions is achieved.



VARIABLE ANGLED GROOVES

Angled groove walls optimize contact with the road and provide enhanced traction when cornering.



FOUR WIDE CIRCUMFERENTIAL GROOVES


Quickly and efficiently evacuate water for enhanced wet traction.



High Speed Durability

JOINTLESS COVER CONSTRUCTION

The speed capable S.drive boasts a line-up in which most of the sizes are Y-rated, an achievement due in part to the double jointless belt cover.



GROOVE-IN-GROOVE TECHNOLOGY



Tiny scores within the tire groove walls help to more effectively distribute stress loads and reduce uneven tire wear.



Smooth Ride

SOLID CENTER RIB

An unbroken center rib maintains continuous road contact, improves lateral stability and minimizes uneven wear, plus enhances comfort with reduced pattern noise.

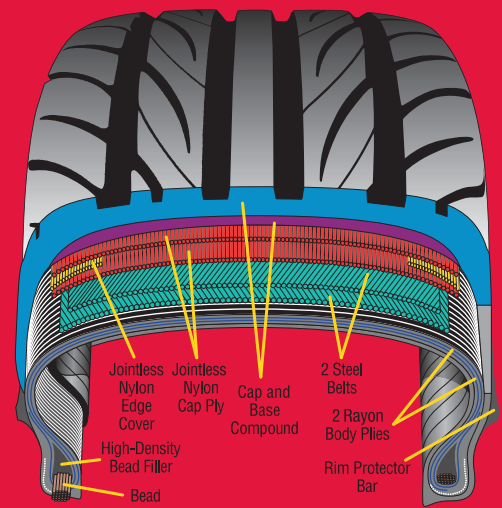

Construction may vary by size and/or speed rating.

For Vehicles Mentioned Below and Many Others:

Acura TL
Acura TSX
Audi A3
Audi A4
BMW 3-series
Ford Mustang
Honda Civic SI
Honda S2000
Infiniti G35 SC
Lexus IS
Mazda Mazda3
Mazda Mazda6

Mazda MX-5
Mercedes Benz C class
Mercedes Benz CLK class
Mitsubishi Eclipse
Mitsubishi Lancer Evolution
Nissan 350Z
Scion TC
Subaru Impreza
Subaru Legacy
Volkswagen GTI
Volkswagen Jetta

Yokohama 30-Day Performance Promise

- Test drive the S.drive for 30 days. If not completely satisfied, bring them back for a full refund. See dealer for complete details.



V, W and Y Speed Rated

UTQG: 300/AA/A

- Highest possible rating for traction and performance
- Treadwear rating of 300 indicates longer mileage





Size Chart

Tire Size	Part No.	UTQG Rating	Unit Weight (lbs.)	Rim Width		Inflated Dimensions				Static Radius (Inches)	Revs. Per Mile	Max. Load at Cold Inflation Pressure (lbs.@psi)	Type	Load ID.
				Measuring (Inches)	Approved (Inches)	Overall Width (Inches)	Overall Diameter (Inches)	Tread Width (Inches)	Tread Depth (32/Inch)					
185/55R14 80V	01048	300/AA/A	17.40	6.0	5.0 - 6.5	7.7	22.0	6.7	10	10.1	945	992@51	BW	SL
185/55R15 82V	01053	300/AA/A	18.30	6.0	5.0 - 6.5	7.6	23.0	6.7	10	10.6	902	1047@51	BW	SL
195/45R15 78W	01054	300/AA/A	17.60	6.5	6.0 - 7.5	7.8	21.8	7.0	10	10.2	952	937@51	BW	SL
195/50R15 82V	01044	300/AA/A	18.70	6.0	5.5 - 7.0	7.8	22.7	7.0	10	10.5	914	1047@51	BW	SL
195/55R15 85V	01047	300/AA/A	19.20	6.0	5.5 - 7.0	8.0	23.3	7.0	10	10.7	890	1136@51	BW	SL
205/50R15 86V	01056	300/AA/A	21.92	6.5	5.5 - 7.5	8.4	23.1	7.4	10	10.7	899	1168@51	BW	SL
205/55R15 88W	01051	300/AA/A	22.55	6.5	5.5 - 7.5	8.6	23.9	7.4	10	11.0	871	1236@51	BW	SL
175/50R16 77T	01172	300/A/A	16.20	5.5	5.0 - 6.0	7.0	22.9	6.3	10	10.7	906	908@51	BW	SL
195/40R16 80W	01071	300/AA/A	18.10	7.0	6.5 - 7.5	8.1	22.1	7.0	10	10.4	939	992@50	BW	XL
195/45R16 84W	01050	300/AA/A	18.50	6.5	6.0 - 7.5	7.8	22.8	7.0	10	10.7	910	1102@50	BW	XL
205/45R16 87W	01046	300/AA/A	20.77	7.0	6.5 - 7.5	8.3	23.1	7.4	10	10.8	899	1201@50	BW	XL
205/50R16 87W	01042	300/AA/A	21.40	6.5	5.5 - 7.5	8.4	24.0	7.4	10	11.1	865	1201@51	BW	SL
205/55R16 91W	01041	300/AA/A	23.96	6.5	5.5 - 7.5	8.6	24.8	7.4	10	11.4	836	1356@51	BW	SL
215/35/16 81W	01073	300/AA/A	18.70	7.5	7.0 - 8.5	8.6	21.9	7.7	10	10.3	951	1019@50	BW	XL
215/40R16 86W	01064	300/AA/A	19.75	7.5	7.0 - 8.5	8.7	22.7	7.7	10	10.6	916	1168@50	BW	XL
215/55R16 93W	01083	300/AA/A	25.13	7.0	6.0 - 7.5	9.1	25.2	7.7	10	11.5	827	1433@51	BW	SL
225/50R16 92W	01034	300/AA/A	25.15	7.0	6.0 - 8.0	9.3	24.8	8.1	10	11.4	839	1389@51	BW	SL
225/55R16 95W	01033	300/AA/A	25.95	7.0	6.0 - 8.0	9.3	25.7	8.1	10	11.8	807	1521@51	BW	SL
195/40R17 81W	01070	300/AA/A	19.20	7.0	6.5 - 7.5	8.1	23.2	7.0	10	10.9	894	1019@50	BW	XL
195/45R17 85W	01063	300/AA/A	20.10	6.5	6.0 - 7.5	7.8	23.9	7.0	10	11.2	869	1135@50	BW	XL
205/40R17 84W	01045	300/AA/A	21.45	7.5	7.0 - 8.0	8.5	23.5	7.4	10	11.0	887	1102@50	BW	XL
205/45R17 88W	01131	300/AA/A	22.05	7.0	6.5 - 7.5	8.2	24.3	7.4	10	11.3	855	1235@50	BW	XL
205/50R17 93W	01132	300/AA/A	24.34	6.5	5.5 - 7.5	8.5	25.1	7.4	10	11.7	827	1433@50	BW	XL
215/35R17 83W	01072	300/AA/A	19.60	7.5	7.0 - 8.5	8.6	22.9	7.7	10	10.8	908	1074@50	BW	XL
215/40R17 87W	01133	300/AA/A	23.32	7.5	7.0 - 8.5	8.7	23.8	7.7	10	11.1	873	1201@50	BW	XL
215/45R17 91W	01134	300/AA/A	24.56	7.0	7.0 - 8.0	8.5	24.7	7.7	10	11.5	841	1356@50	BW	XL
215/50R17 95W	01135	300/AA/A	25.18	7.0	6.0 - 7.5	8.9	25.5	7.7	10	11.8	814	1521@50	BW	XL
215/55R17 98W	01136	300/AA/A	26.79	7.0	6.0 - 7.5	9.1	26.3	7.7	10	12.1	789	1653@50	BW	XL
225/35R17 86Y	01067	300/AA/A	20.50	8.0	7.5 - 9.0	9.0	23.1	8.1	10	10.9	897	1168@50	BW	XL
225/45R17 91W	01189	300/AA/A	24.58	7.5	7.0 - 8.5	8.9	24.9	8.1	10	11.6	833	1356@51	BW	SL
225/50R17 98W	01137	300/AA/A	27.60	7.0	6.0 - 8.0	9.2	25.8	8.1	10	11.9	805	1653@50	BW	XL
225/55R17 97W	01190	300/AA/A	28.70	7.0	6.0 - 8.0	9.3	26.8	8.1	10	12.3	776	1609@51	BW	SL
235/40R17 90W	01191	300/AA/A	24.87	8.5	8.0 - 9.5	9.6	24.3	8.4	10	11.4	854	1323@51	BW	SL
235/45R17 97W	01138	300/AA/A	26.37	8.0	7.5 - 9.0	9.4	25.3	8.4	10	11.7	820	1609@50	BW	XL
235/50R17 100W	01161	300/AA/A	28.18	7.5	6.5 - 8.5	9.7	26.4	8.4	10	12.2	787	1764@50	BW	XL
235/55R17 103W	01162	300/AA/A	29.98	7.5	6.5 - 8.5	9.8	27.1	8.4	10	12.5	766	1929@50	BW	XL
245/40R17 91W	01193	300/AA/A	25.86	8.5	8.0 - 9.5	9.8	24.7	8.8	10	11.5	841	1356@51	BW	SL
245/45R17 99W	01163	300/AA/A	27.32	8.0	7.5 - 9.0	9.7	25.6	8.8	10	11.9	812	1709@50	BW	XL
255/40R17 94W	01182	300/AA/A	27.07	9.0	8.5 - 10.0	10.3	25.0	9.1	10	11.6	831	1477@51	BW	SL
275/40R17 98W	01164	300/AA/A	29.72	9.5	9.0 - 11.0	11.1	25.7	9.8	10	11.9	808	1653@51	BW	SL
205/40R18 86Y	01061	300/AA/A	20.50	7.5	7.0 - 8.0	8.5	24.4	7.4	10	11.5	851	1168@50	BW	XL
215/35R18 84Y	01057	300/AA/A	20.40	7.5	7.0 - 8.5	8.5	23.9	7.7	10	11.3	871	1102@50	BW	XL
215/40R18 89Y	01065	300/AA/A	21.60	7.5	7.0 - 8.5	8.7	24.7	7.7	10	11.6	840	1279@50	BW	XL
225/35R18 87Y	01068	300/AA/A	21.40	8.0	7.5 - 9.0	9.0	24.2	8.1	10	11.4	858	1201@50	BW	XL
225/40R18 92W	01183	300/AA/A	25.16	8.0	7.5 - 9.0	9.1	25.1	8.1	10	11.8	827	1389@50	BW	XL
225/45R18 95W	01174	300/AA/A	26.21	7.5	7.0 - 8.5	8.9	25.9	8.1	10	12.1	802	1521@50	BW	XL
225/50R18 95W	01176	300/AA/A	26.14	7.0	6.0 - 8.0	9.2	27.0	8.1	10	12.5	769	1521@51	BW	SL
235/40R18 95W	01192	300/AA/A	26.15	8.5	8.0 - 9.5	9.6	25.4	8.4	10	11.9	817	1521@50	BW	XL
235/50R18 97W	01173*													
245/35R18 92Y	01069	300/AA/A	23.10	8.5	8.0 - 9.5	9.7	24.7	8.8	10	11.6	840	1389@50	BW	XL
245/40R18 97W	01194	300/AA/A	27.56	8.5	8.0 - 9.5	9.6	25.8	8.8	10	12.0	805	1609@50	BW	XL
245/45R18 100W	01175	300/AA/A	29.12	8.0	7.5 - 9.0	9.6	26.7	8.7	10	12.4	778	1764@50	BW	XL
255/35R18 94Y	01058	300/AA/A	24.50	9.0	8.5 - 10.0	10.2	24.9	9.1	10	11.7	833	1477@50	BW	XL
255/45R18 99W	01195	300/AA/A	31.02	8.5	8.0 - 9.5	10.1	27.0	9.1	10	12.5	769	1709@51	BW	SL
265/35R18 97Y	01089	300/AA/A	25.30	9.5	9.0 - 10.5	10.7	25.2	9.5	10	11.8	823	1609@50	BW	XL
275/35R18 99Y	01088	300/AA/A	25.90	9.5	9.0 - 11.0	10.9	25.5	9.8	10	11.9	815	1709@50	BW	XL
275/40R18 99Y	01168	300/AA/A	28.00	9.5	9.0 - 11.0	11.1	26.5	9.8	10	12.3	783	1709@51	BW	SL
215/35R19 85Y	01066	300/AA/A	21.40	7.5	7.0 - 8.5	8.5	24.9	7.7	10	11.8	833	1135@50	BW	XL
225/35R19 88Y	01060	300/AA/A	22.50	8.0	7.5 - 9.0	8.9	25.2	8.1	10	11.9	823	1236@50	BW	XL
225/45R19 96W	01196	300/AA/A	24.61	7.5	7.0 - 8.5	8.8	27.1	8.1	10	12.6	767	1565@50	BW	XL
235/35R19 91Y	01059	300/AA/A	23.40	8.5	8.0 - 9.5	9.4	25.5	8.4	10	12.0	815	1356@50	BW	XL
245/30R19 89Y	01127	300/AA/A	23.10	8.5	8.0 - 9.0	9.7	24.8	8.8	10	11.8	837	1279@50	BW	XL
245/35R19 93Y	01080	300/AA/A	24.30	8.5	8.0 - 9.5	9.7	25.7	8.8	10	12.1	807	1433@50	BW	XL
245/40R19 94Y	01165	300/AA/A	25.80	8.5	8.0 - 9.5	9.9	26.7	8.8	10	12.5	779	1477@51	BW	SL
245/45R19 98Y	01179	300/AA/A	28.70	8.0	7.5 - 9.0	9.8	27.7	8.8	10	12.9	749	1653@51	BW	SL
255/30R19 91Y	01100	300/AA/A	24.40	9.0	8.5 - 9.5	10.1	25.1	9.1	10	11.9	828	1356@50	BW	XL
255/40R19 96Y	01166	300/AA/A	27.40	9.0	8.5 - 10.0	10.4	26.9	9.1	10	12.6	771	1565@51	BW	SL
265/30R19 93Y	01078	300/AA/A	25.50	9.5	9.0 - 10.0	10.4	25.3	9.5	10	11.9	822	1433@50	BW	XL
275/30R19 96Y	01081	300/AA/A	26.20	9.5	9.0 - 10.0	10.6	25.5	9.8	10	12.0	815	1565@50	BW	XL
275/35R19 96Y	01167	300/AA/A	27.90	9.5	9.0 - 11.0	10.9	26.5	9.8	10	12.4	784	1565@51	BW	SL
275/40R19 101Y	01180	300/AA/A	30.10	9.5	9.0 - 11.0	11.1	27.6	9.8	10	12.8	754	1819@51	BW	SL
225/35R20 90Y	01074	300/AA/A	23.60	8.0	7.5 - 9.0	8.9	26.3	8.1	10	12.4	791	1323@50	BW	XL
245/35R20 95Y	01039	300/AA/A	25.80	8.5	8.0 - 9.5	9.8	26.7	8.8	10	12.6	777	1521@50	BW	XL
245/40R20 99Y	01038	300/AA/A	27.70	8.5	8.0 - 9.5	8.5	27.7	8.8	10	13.0	750	1709@50	BW	XL
255/30R20 92Y	01085	300/AA/A	26.10	9.0	8.5 - 9.5	10.1	26.1	9.1	10	12.4	797	1389@50	BW	XL
255/35R20 97Y	01036	300/AA/A	28.40	9.0	8.5 - 10.0	10.2	27.0	9.1	10	12.7	770	1609@50	BW	XL
275/30R20 97Y	01075	300/AA/A	27.40	9.5	9.0 - 10.0	10.7	26.5	9.8	10	12.5	785	1609@50	BW	XL
275/35R20 102Y	01076	300/AA/A	29.40	9.5	9.0 - 11.0	10.9	27.5	9.8	10	12.9	755	1874@50	BW	XL
285/30R20 99Y	01037	300/AA/A	29.80	10.0	9.5 - 10.5	11.2	26.8	10.2	10	12.6	776	1709@50	BW	XL

* Available 2nd Quarter 2011 SL = Standard Load XL = Extra Load and Reinforced Load